

Evoke 1200/1200B

LED Spot Light




1. Choice of models: 5600K or 3200K / 2700K-6500K
2. Revolutionary new 1.2kW LED spotlight, powerful output comparable to 1.8KW PAR or 2.5KW HMI Fresnel
3. IP54 rating weather resistance
4. Support both wired and wireless control via NANLINK APP, DMX/RDM, Remote Control and Lumenradio CRMX
5. Fully dimmable from 0-100% in ultra-precise intervals of just 0.1%
6. Multiple optional modifiers and compatible with DoPchoice
7. Built-in 11/12 customisable practical effects



Includes:

Evoke 1200/1200B x 1, Yoke x 1, Power Supply x 1, Reflector x 1, DC Connection Cable 7.5M x 1, AC Power Cable 6M x 1, AS-CP-QR-EV Evoke Quick Release Clamp x 1, USB Flash Drive x 1, WS-RC-C2 Remote Controller x 1, User Manual x 1, DMX Reference Guide x 1

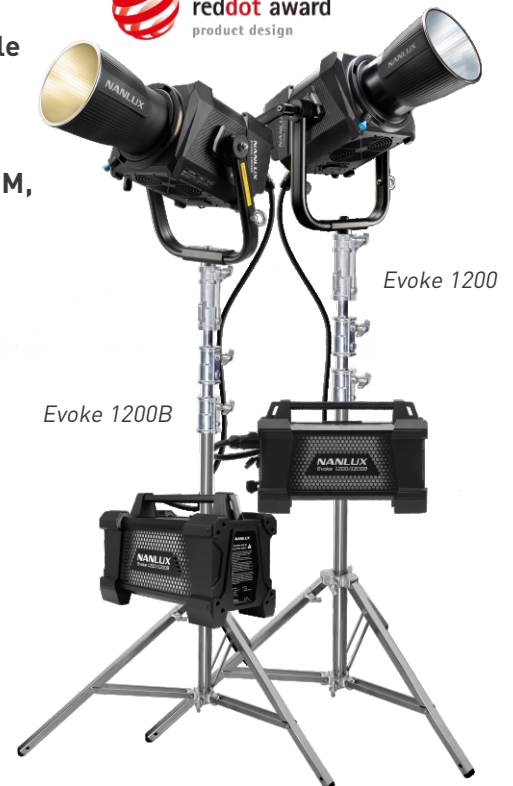


Evoke 1200

Evoke 1200B



Multiple Accessories, More Applications

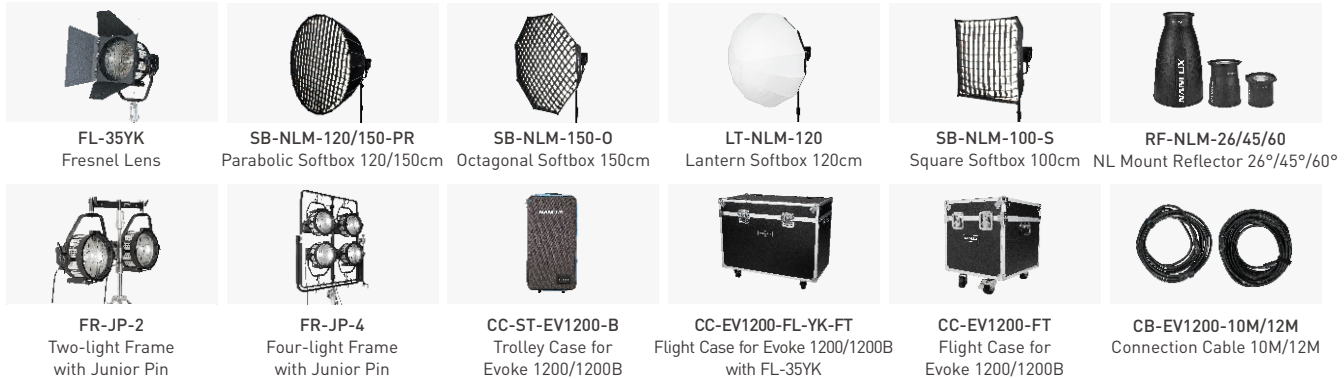

Evoke Technical Data

Model	Evoke 1200	Evoke 1200B
Rated Power	1200W	1200W
Input Voltage/Current	DC 48V/25A Max, AC 100-240V 50/60Hz	DC48V/25A Max, AC100-240V 50/60Hz
CRI	96	Average 96
TLCI	97	Average 97
CCT	3200K/5600K	2700K-6500K
Dimming	0-100%, stepless 0.1% from 0-100%	
IP Rating	IP54	
Control	On-board, Remote Control, NANLINK APP, DMX/RDM, Lumenradio CRMX	
On Board Effects	CCT Loop (Bi-color), INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion, Welding	
Product Size	Light Fixture (without Yoke): 330×241×210mm/12.99×9.48×8.26" Light Fixture (with Yoke): 503×370×210mm/19.8×14.56×8.26" Power Supply: 376.5×181×246mm/14.82×7.12×9.68"	
Product Weight	Light Fixture: 6.94kg/15.3lb Yoke: 1.84kg/4.05lb Power Supply: 10.5kg/23.14lb	Light Fixture: 7.75kg/17.09lb Yoke: 1.84kg/4.06lb Power Supply: 10.5kg/23.15lb

Illumination(lux/ftc)

Model	Evoke 1200							
CCT	5600K							
Distance	3M		5M		7M		10M	
Light Only	5532 lux / 514 ftc		2373 lux / 220 ftc		1266 lux / 118 ftc		679 lux / 63 ftc	
With 26° Reflector	58050 lux / 5395 ftc		18370 lux / 1707 ftc		9180 lux / 853 ftc		4626 lux / 430 ftc	
With 45° Reflector	18460 lux / 1715 ftc		6583 lux / 612 ftc		3671 lux / 341 ftc		2021 lux / 188 ftc	
With 60° Reflector	12460 lux / 1158 ftc		4645 lux / 432 ftc		2654 lux / 247 ftc		1432 lux / 133 ftc	
With Fresnel Lens 11°	65280 lux / 6065 ftc		22080 lux / 2051 ftc		11765 lux / 1093 ftc		6308 lux / 586 ftc	
With Fresnel Lens 45°	15170 lux / 1409 ftc		5718 lux / 531 ftc		3065 lux / 285 ftc		1644 lux / 153 ftc	

Model	Evoke 1200B							
CCT	3200K				5600K			
Distance	3M	5M	7M	10M	3M	5M	7M	10M
Light Only	4571 lux / 425 ftc	1955 lux / 182 ftc	1088 lux / 101 ftc	558 lux / 52 ftc	5258 lux / 488 ftc	2244 lux / 208 ftc	1261 lux / 117 ftc	647 lux / 60 ftc
With 26° Reflector	51950 lux / 4826 ftc	16180 lux / 1503 ftc	8035 lux / 746 ftc	4320 lux / 401 ftc	61030 lux / 5670 ftc	18860 lux / 1752 ftc	9377 lux / 871 ftc	5005 lux / 465 ftc
With 45° Reflector	15900 lux / 1477 ftc	5816 lux / 540 ftc	3320 lux / 308 ftc	1857 lux / 173 ftc	18570 lux / 1725 ftc	6800 lux / 632 ftc	3872 lux / 360 ftc	2154 lux / 200 ftc
With 60° Reflector	10210 lux / 949 ftc	4117 lux / 382 ftc	2382 lux / 221 ftc	1307 lux / 121 ftc	12240 lux / 1137 ftc	4725 lux / 439 ftc	2800 lux / 260 ftc	1514 lux / 141 ftc
With Fresnel Lens 11°	43480 lux / 4039 ftc	15610 lux / 1450 ftc	8056 lux / 748 ftc	4119 lux / 383 ftc	49940 lux / 4639 ftc	17810 lux / 1655 ftc	9211 lux / 856 ftc	4710 lux / 438 ftc
With Fresnel Lens 45°	11320 lux / 1052 ftc	4603 lux / 428 ftc	2693 lux / 250 ftc	1474 lux / 137 ftc	13010 lux / 1209 ftc	5286 lux / 491 ftc	3067 lux / 285 ftc	1702 lux / 158 ftc