













The FS Series comes in 4 sizes, total 7 models in different power from 70W to 350W. It is an AC power LED Spot Light range that with both daylight and bi-color version to meet your different demands.



## FS-60B Bi-color

LED Studio Light

 Rated Power 70W	 CCT Range 2700K-6500K	 CRI: Average 96 TLCI: Average 97	 Built-in 12 Practical Effects	 13,360 lux@1m (With Reflector at 5600K)
 Output Modes Maximum & Constant	 Compatible with FMM Ecosystem Modifiers	 On-board Remote Control NANLINK APP	 Lightweight All-in-one Design	 Firmware Upgradable




**Includes:**

Light x 1, Power Cable 3M x 1, RF-FMM-45-S Reflector x 1, COB Protective Cap x 1, AS-BA-FMM Bowens Mount Adapter x 1, User Manual x 1

## FS-150/200/300 Daylight

LED Studio Light

 Rated Power 185W/240W/350W	 CCT Range 5600K	 CRI: 96 TLCI: 98	 Built-in 11 Practical Effects	 FS-150: 26,380 lux@1m FS-200: 29,380 lux@1m FS-300: 41,040 lux@1m (With Reflector at 5600K)
 Compatible with Bowens Mount Modifiers	 On-board Remote Control NANLINK APP	 Lightweight All-in-one Design	 Firmware Upgradable	













**Includes:**

Light x 1, Power Cable 4.5M x 1, RF-BM Reflector x 1, COB Protective Cap x 1, User Manual x 1

## FS-150B/200B/300B Bi-color

LED Studio Light

 Rated Power 175W/220W/350W	 CCT Range 2700K-6500K	 CRI: Average 96 TLCI: Average 97	 Built-in 12 Practical Effects	 FS-150B: 26,300 lux@1m FS-200B: 29,490 lux@1m FS-300B: 38,720 lux@1m (With Reflector at 5600K)
 Output Modes Maximum & Constant	 Compatible with Bowens Mount Modifiers	 On-board Remote Control NANLINK APP	 Lightweight All-in-one Design	 Firmware Upgradable



**Includes:**

Light x 1, Power Cable 4.5M x 1, RF-BM Reflector x 1, COB Protective Cap x 1, User Manual x 1

## Remote Control System



RC-1  
Remote Controller



WS-RC-C2  
2.4G Remote Controller



WS-TB-1  
NANLINK BOX

## Bowens Mount Accessories(optional)



PJ-BM-19/36  
Projection Attachment with  
Bowens Mount



FL-20G  
Fresnel Lens

## FM Mount Accessories(optional)



PJ-FMM-19/36  
Projection Attachment with FM Mount



AS-BA-FMM  
Bowens Adapter  
(Included)



LT-80/LT-120  
Lantern Softbox



U-135DS/U-165DT/U-180ST  
Umbrella



FL-11  
Fresnel Lens



SB-FMM-60  
FMM 60 Softbox  
FM & Bowens Mount  
(EC-FMM60 Eggcrate)



LT-FMM-60  
Lantern Softbox 60  
FM & Bowens Mount



SB-ST-140X30 Strip Softbox  
SB-AS-110X45 Asymmetric Softbox  
SB-RT-90x60 Rectangle SoftBox  
EC-140X30/EC-110X45 Eggcrate



SB-PR-90/120/150-Q Quick Release Parabolic Softbox  
SB-PR-90/120/150 Parabolic Softbox  
EC-PR90/120/150 Eggcrate






Live Stream



Wedding Photography

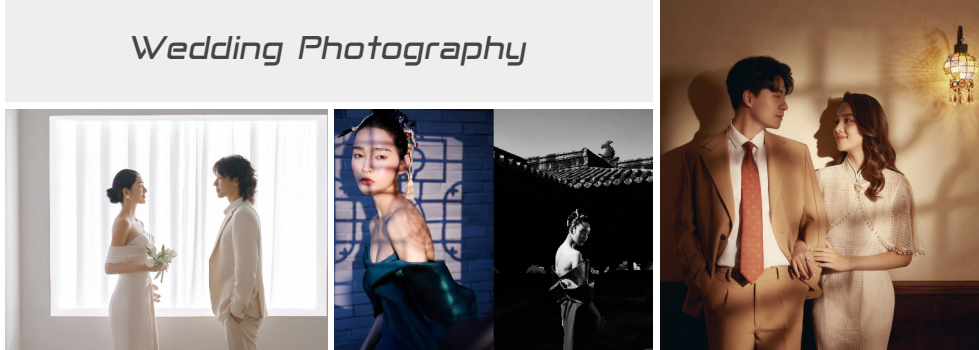

Portrait Photography



Commercial Photography



# FS-60B Technical Data

<b>Model</b>	<b>FS-60B</b>
<b>Rated Power</b>	70W
<b>Input Voltage/Current</b>	AC 100-240V 50/60Hz
<b>CRI</b>	Average 96
<b>TLCI</b>	Average 97
<b>CCT</b>	2700K-6500K
<b>Dimming</b>	0-100%
<b>Control</b>	On-board , Remote Control, NANLINK APP
<b>Special Effects</b>	CCT Loop, INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion and Welding
<b>Product Size</b>	247 × 134 × 87mm / 9.72 × 5.28 × 3.43"
<b>Product Weight</b>	0.85kg / 1.87lb

### Illumination(lux / fc)

<b>Model</b>	<b>FS-60B</b>			
	<b>Light Only</b>			
<b>Distance</b>	<b>2700K</b>	<b>3200K</b>	<b>5600K</b>	<b>6500K</b>
<b>1M</b>	2467 lux / 229 fc	2630 lux / 244 fc	2799 lux / 260 fc	2791 lux/259 fc
<b>2M</b>	636 lux / 59 fc	679 lux / 63 fc	723 lux / 67 fc	720 lux / 67 fc
<b>3M</b>	296 lux / 27 fc	315 lux / 29 fc	339 lux / 31 fc	339 lux / 31 fc

### With Reflector

<b>Distance</b>	<b>2700K</b>	<b>3200K</b>	<b>5600K</b>	<b>6500K</b>
<b>1M</b>	11350 lux / 1054 fc	12370 lux / 1149 fc	13360 lux / 1241 fc	13250 lux / 1231 fc
<b>2M</b>	2536 lux / 236 fc	2720 lux / 253 fc	2959 lux / 275 fc	2925 lux / 272 fc
<b>3M</b>	1096 lux / 102 fc	1175 lux / 109 fc	1272 lux / 118 fc	1252 lux / 116 fc

### With FL-11 Spot

<b>Distance</b>	<b>2700K</b>	<b>3200K</b>	<b>5600K</b>	<b>6500K</b>
<b>1M</b>	27890 lux / 2591 fc	30260 lux / 2811 fc	32510 lux / 3020 fc	32380 lux / 3008 fc
<b>2M</b>	6610 lux / 614 fc	7092 lux / 659 fc	7635 lux / 709 fc	7604 lux / 706 fc
<b>3M</b>	2906 lux / 270 fc	3080 lux / 286 fc	3318 lux / 308 fc	3308 lux / 307 fc

### With FL-11 Flood

<b>Distance</b>	<b>2700K</b>	<b>3200K</b>	<b>5600K</b>	<b>6500K</b>
<b>1M</b>	6843 lux / 636 fc	7645 lux / 710 fc	8223 lux / 764 fc	8134 lux / 756 fc
<b>2M</b>	1690 lux / 157 fc	1805 lux / 168 fc	1932 lux / 179 fc	1920 lux / 178 fc
<b>3M</b>	758 lux / 70 fc	810 lux / 75 fc	871 lux / 81 fc	864 lux / 80 fc

### With PJ-FMM-19

<b>Distance</b>	<b>2700K</b>	<b>3200K</b>	<b>5600K</b>	<b>6500K</b>
<b>1M</b>	39150 lux / 3637 fc	41450 lux / 3851 fc	44320 lux / 4117 fc	44160 lux / 4102 fc
<b>2M</b>	7258 lux / 674 fc	7718 lux / 717 fc	8292 lux / 770 fc	8212 lux / 763 fc
<b>3M</b>	2942 lux / 273 fc	3191 lux / 296 fc	3360 lux / 312 fc	3356 lux / 312 fc

### With PJ-FMM-36

<b>Distance</b>	<b>2700K</b>	<b>3200K</b>	<b>5600K</b>	<b>6500K</b>
<b>1M</b>	15430 lux / 1433 fc	16470 lux / 1530 fc	17730 lux / 1647 fc	17680 lux / 1642 fc
<b>2M</b>	2926 lux / 272 fc	3134 lux / 291 fc	3451 lux / 321 fc	3428 lux / 318 fc
<b>3M</b>	1219 lux / 113 fc	1303 lux / 121 fc	1425 lux / 132 fc	1413 lux / 131 fc

# FS Technical Data

<b>Model</b>	<b>FS-150</b>	<b>FS-150B</b>
<b>Rated Power</b>	185W	175W
<b>Input Voltage/Current</b>	AC 100-240V 50/60HZ	AC 100-240V 50/60HZ
<b>CRI</b>	96	Average 96
<b>TLCI</b>	98	Average 97
<b>CCT</b>	5600K	2700K-6500K

**Dimming** 0-100%

**Control** On-board, Remote Control, NANLINK APP

**Special Effects** CCT Loop[\*bi-color only], INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion and Welding

**Product Size** 356 × 213 × 115mm / 14.02 × 8.39 × 4.53"

**Product Weight** 2.27kg / 5.00lb 2.3kg / 5.07lb

### Illumination(lux / fc)

#### FS-150

<b>Color Temperature</b>	<b>5600K</b>		
<b>Distance</b>	<b>1M</b>	<b>2M</b>	<b>3M</b>
<b>Light Only</b>	6903 lux 641 fc	1721 lux 160 fc	814 lux 76 fc
<b>With Reflector</b>	26380 lux 2451 fc	5651 lux 525 fc	2422 lux 225 fc
<b>With FL-20G Spot</b>	54890 lux 5099 fc	11360 lux 1055 fc	4737 lux 440 fc
<b>With FL-20G Flood</b>	15920 lux 1479 fc	3914 lux 364 fc	1741 lux 162 fc
<b>With PJ-BM-19</b>	86630 lux 8048 fc	11200 lux 1040 fc	4220 lux 392 fc
<b>With PJ-BM-36</b>	21600 lux 2007 fc	3826 lux 355 fc	1558 lux 145 fc

#### FS-150B

<b>Color Temperature</b>	<b>2700K</b>			<b>3200K</b>			<b>5600K</b>			<b>6500K</b>		
<b>Distance</b>	<b>1M</b>	<b>2M</b>	<b>3M</b>	<b>1M</b>	<b>2M</b>	<b>3M</b>	<b>1M</b>	<b>2M</b>	<b>3M</b>	<b>1M</b>	<b>2M</b>	<b>3M</b>
<b>Light Only</b>	4999 lux 464 fc	1264 lux 117 fc	610 lux 57 fc	6126 lux 569 fc	1543 lux 143 fc	743 lux 69 fc	7298 lux 678 fc	1836 lux 171 fc	883 lux 82 fc	6432 lux 598 fc	1623 lux 151 fc	781 lux 73 fc
<b>With Reflector</b>	18160 lux 1687 fc	3941 lux 366 fc	1710 lux 159 fc	21890 lux 2034 fc	4836 lux 449 fc	2094 lux 195 fc	26300 lux 2443 fc	5742 lux 533 fc	2497 lux 232 fc	32220 lux 2157 fc	5105 lux 474 fc	2207 lux 205 fc
<b>With FL-20G Spot</b>	97400 lux 9048 fc	22570 lux 2097 fc	9630 lux 895 fc	120000 lux 11148 fc	28020 lux 2603 fc	11970 lux 1112 fc	142000 lux 13192 fc	34100 lux 3168 fc	14660 lux 1362 fc	126000 lux 11705 fc	30410 lux 2825 fc	12870 lux 1196 fc
<b>With FL-20G Flood</b>	14300 lux 1328 fc	3654 lux 339 fc	1657 lux 154 fc	16850 lux 1565 fc	4460 lux 414 fc	2023 lux 188 fc	19920 lux 1851 fc	5305 lux 493 fc	2399 lux 223 fc	17610 lux 1636 fc	4699 lux 437 fc	2129 lux 198 fc
<b>With PJ-BM-19</b>	/	25910 lux 2407 fc	9021 lux 838 fc	/	31810 lux 2955 fc	11040 lux 1026 fc	/	38140 lux 3543 fc	13210 lux 1227 fc	/	33370 lux 3100 fc	11650 lux 1082 fc
<b>With PJ-BM-36</b>	49160 lux 4567 fc	8040 lux 747 fc	3218 lux 299 fc	61830 lux 5744 fc	9980 lux 927 fc	3944 lux 366 fc	74520 lux 6923 fc	11850 lux 1101 fc	4700 lux 437 fc	65950 lux 6127 fc	10550 lux 980 fc	4168 lux 387 fc

**FS** Technical Data

Model	FS-200	FS-200B
Rated Power	240W	220W
Input Voltage/Current	AC 100-240V 50/60HZ	AC 100-240V 50/60HZ
CRI	96	Average 96
TLCI	98	Average 97
CCT	5600K	2700K-6500K
Dimming	0-100%	
Control	On-board, Remote Control, NANLINK APP	
Special Effects	CCT Loop(*bi-color only), INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion and Welding	
Product Size	306 × 232 × 123mm/12.05 × 9.13 × 4.84"	309 × 232 × 123mm / 12.17 × 9.13 × 4.84"
Product Weight	2.48kg / 5.47lb	2.6kg / 5.73lb

**Illumination(lux / fc)**

**FS-200**

Color Temperature	5600K		
	1M	2M	3M
Light Only	7852 lux 729 fc	1978 lux 184 fc	951 lux 88 fc
With Reflector	29380 lux 2729 fc	6388 lux 593 fc	2776 lux 258 fc
With FL-20G Spot	53858 lux 5003 fc	11216 lux 1042 fc	4732 lux 440 fc
With FL-20G Flood	18160 lux 1687 fc	4527 lux 421 fc	2027 lux 188 fc
With PJ-BM-19	89590 lux 8323 fc	11620 lux 1079 fc	4476 lux 416 fc
With PJ-BM-36	22860 lux 2124 fc	4065 lux 378 fc	1630 lux 151 fc

**FS-200B**

Distance	2700K			3200K			5600K			6500K		
	1M	2M	3M	1M	2M	3M	1M	2M	3M	1M	2M	3M
Light Only	6237 lux 579 fc	1572 lux 146 fc	733 lux 68 fc	7845 lux 729 fc	1985 lux 184 fc	928 lux 86 fc	8578 lux 797 fc	2173 lux 202 fc	1021 lux 95 fc	7509 lux 698 fc	1898 lux 176 fc	888 lux 82 fc
With Reflector	21180 lux 1968 fc	4574 lux 425 fc	1940 lux 180 fc	26810 lux 2491 fc	5776 lux 537 fc	2456 lux 228 fc	29490 lux 2740 fc	6370 lux 592 fc	2731 lux 254 fc	25800 lux 2397 fc	5561 lux 517 fc	2386 lux 222 fc
With FL-20G Spot	112000 lux 10405 fc	24900 lux 2313 fc	10730 lux 997 fc	142000 lux 13192 fc	31970 lux 2970 fc	13650 lux 1268 fc	158000 lux 14678 fc	36110 lux 3355 fc	15270 lux 1419 fc	140000 lux 13006 fc	31580 lux 2934 fc	13420 lux 1247 fc
With FL-20G Flood	17230 lux 1610 fc	4502 lux 418 fc	2081 lux 193 fc	21880 lux 2033 fc	5689 lux 528 fc	2426 lux 244 fc	23900 lux 2220 fc	6292 lux 585 fc	2880 lux 268 fc	20900 lux 1942 fc	5495 lux 510 fc	2512 lux 233 fc
With PJ-BM-19	/	30500 lux 2833 fc	10910 lux 1014 fc	/	38820 lux 3606 fc	14260 lux 1325 fc	/	43010 lux 3996 fc	16010 lux 1487 fc	/	37360 lux 3471 fc	14000 lux 1301 fc
With PJ-BM-36	56040 lux 5206 fc	10120 lux 940 fc	4127 lux 383 fc	71040 lux 6600 fc	12920 lux 1200 fc	5180 lux 481 fc	78100 lux 7255 fc	14430 lux 1341 fc	5763 lux 535 fc	68490 lux 6363 fc	12670 lux 1177 fc	5000 lux 464 fc

**FS** Technical Data

Model	FS-300	FS-300B
Rated Power	350W	
Input Voltage/Current	AC 100-240V 50/60HZ	AC 100-240V 50/60HZ
CRI	96	Average 96
TLCI	98	Average 97
CCT	5600K	2700K-6500K
Dimming	0-100%	
Control	On-board, Remote Control, NANLINK APP	
Special Effects	CCT Loop(*bi-color only), INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion and Welding	
Product Size	342.5 × 232 × 123mm/13.48 × 9.13 × 4.84"	
Product Weight	2.95kg / 6.49lb	3.03kg / 6.68lb

**Illumination(lux / fc)**

**FS-300**

Color Temperature	5600K		
	1M	2M	3M
Light Only	12550 lux 1166 fc	3074 lux 286 fc	1447 lux 134 fc
With Reflector	41040 lux 3813 fc	8852 lux 822 fc	3780 lux 351 fc
With FL-20G Spot	50380 lux 4680 fc	10480 lux 974 fc	4387 lux 408 fc
With FL-20G Flood	22610 lux 2100 fc	5658 lux 526 fc	2515 lux 234 fc
With PJ-BM-19	81300 lux 7553 fc	10500 lux 975 fc	3979 lux 370 fc
With PJ-BM-36	19690 lux 1829 fc	3628 lux 337 fc	1480 lux 137 fc

**FS-300B**

Distance	2700K			3200K			5600K			6500K		
	1M	2M	3M	1M	2M	3M	1M	2M	3M	1M	2M	3M
Light Only	9220 lux 857 fc	2380 lux 221 fc	1160 lux 108 fc	11150 lux 1036 fc	2891 lux 269 fc	1406 lux 130 fc	11130 lux 1034 fc	2881 lux 268 fc	1394 lux 130 fc	9780 lux 909 fc	2527 lux 235 fc	1221 lux 113 fc
With Reflector	31630 lux 2938 fc	6857 lux 637 fc	2930 lux 272 fc	38900 lux 3614 fc	8465 lux 786 fc	3529 lux 328 fc	38720 lux 3597 fc	8398 lux 780 fc	3522 lux 327 fc	34340 lux 3190 fc	7354 lux 683 fc	3127 lux 290 fc
With FL-20G Spot	127000 lux 11798 fc	32060 lux 2978 fc	8607 lux 800 fc	159000 lux 14771 fc	39270 lux 3648 fc	10550 lux 980 fc	158000 lux 14678 fc	39140 lux 3636 fc	10340 lux 961 fc	139000 lux 12913 fc	34330 lux 3189 fc	9290 lux 863 fc
With FL-20G Flood	24560 lux 2282 fc	6200 lux 576 fc	2804 lux 260 fc	29820 lux 2770 fc	7545 lux 701 fc	3401 lux 316 fc	29510 lux 2741 fc	7540 lux 700 fc	3395 lux 315 fc	24420 lux 2287 fc	6595 lux 613 fc	2970 lux 276 fc
With PJ-BM-19	/	33190 lux 3083 fc	12600 lux 1171 fc	/	40610 lux 3773 fc	15430 lux 143 fc	/	40510 lux 3763 fc	15300 lux 1421 fc	/	35940 lux 3339 fc	13520 lux 1256 fc
With PJ-BM-36	63950 lux 5941 fc	11010 lux 1023 fc	4452 lux 414 fc	78060 lux 7252 fc	13620 lux 1265 fc	5511 lux 512 fc	77820 lux 7229 fc	13470 lux 1251 fc	5497 lux 511 fc	68800 lux 6392 fc	12080 lux 1130 fc	4838 lux 449 fc