



GUANGDONG NANGUANG PHOTO&VIDEO SYSTEMS CO., LTD.

Tel: +86-754-85751187 85310187

Fax: +86-754-85300887

E-mail: info@nanlite.com

Service Mail: service@nanlite.com

Add: Dongli Section, Highway 324, Chenghai, Shantou City, Guangdong Province, China



www.nanlite.com



NANLINK APP
Google Play



NANLINK APP
APP Store



NANLITE Catalogue



NANLITE Social

WWW.NANLITE.COM

NANLITE

Forza Series

LED Spot Light

Guangdong Nanguang Photo&Video Systems Co., Ltd.



Compact Design, Ultra Bright

Forza 60/60B II

Brigher • Quieter • Better



Rated Power
72W



CCT Range
5600K
2700K-6500K



Built-in 11/12
Practical Effects



CRI: 95+
TLCI: 98+



Compatible with
FMM Ecosystem
Modifiers



Output Modes
Maximum & Constant
(bi-color only)



Lightweight
Compact Design



AC/DC Supply



~20dBA



On-board
NANLINK APP
Remote Control
DMX/RDM



Firmware
Upgradable



17,620lux/14,350lux@1m
(with reflector at 5600K)



Includes:

Light x 1, Power Adapter x 1, Power Cable 3M x 1, COB Protective Cap x 1, RF-FMM-45-S Reflector x 1, BH-FZ60 Battery Grip x 1, AS-BA-FMM Bowens Adapter x 1, Carrying bag x 1, User Manual x 1

Forza 60C

Palm-sized, Full Spectrum



Rated Power
88W



CCT Range
1800K-20000K



Built-in 15
Practical Effects



Compatible with
FMM Ecosystem
Modifiers



Output Modes
Maximum &
Constant



On-board
NANLINK APP
Remote Control
DMX/RDM



CRI: Average 96
TLCI: Average 95
TM-30 Rf: Average 94
TM-30 Rg: Average 100



Lightweight
Compact Design



AC/DC Supply



~20dBA



Firmware
Upgradable



±100



RGBLAC



HSI/RGBW/XY



12,810lux@1M
(with reflector at 5600K)



Includes:

Light x 1, Power Adapter x 1, Power Cable 3M x 1, COB Protective Cap x 1, RF-FMM-45-S Reflector x 1, BH-FZ60 Battery Grip x 1, AS-BA-FMM Bowens Adapter x 1, Carrying bag x 1, User Manual x 1

Forza 150/150B

Portable • Capable • Silent



Rated Power
170W



CCT Range
5600K
2700K-6500K



Built-in 11/12
Practical Effects



CRI: 96+
TLCI: 98+
TM-30 Rf: 93+
TM-30 Rg: 102+



Compatible with
FMM Ecosystem
Modifiers



Lightweight
Compact Design



AC/DC Supply



Firmware
Upgradable



On-board
NANLINK APP
Remote Control
DMX/RDM



27,960/23,130lux@1m
(with reflector at 5600K)



Includes:

Light x 1, Power Adapter x 1, Power Cable 3M x 1, COB Protective Cap x 1, RF-FMM-45 Reflector x 1, AS-BA-FMM Bowens Adapter x 1, Carrying bag x 1, User Manual x 1

FM Mount Accessories (Optional)



RC-1
Remote Controller



WS-RC-C2
2.4G Remote Controller



WS-TB-1
NANLINK BOX



AS-BA-FMM
Bowens Adapter
(Included)



CB-DT/DC
D-tap Cable
for Forza 60 II/60B II/60C



CB-DMX-3.5C-1/2
DMX Adapter Cable
with 3.5mm Connector



BT-BA-SNP/DC
Sony NP Battery Adapter
for Forza 60 II/60B II/60C



BT-BA-V
V-mount Battery Adapter
with Clamp
for Forza 60 II/60B II/60C



BH-FZ60-V
V-mount Battery Grip
for Forza 60/60B



BH-FZ60 Battery Grip
for Forza 60 II/60B II/60C
(suggested to work with NP-F970)
(Included)



BT-BG-XLR4
V Mount Battery Grip
with 4 Pin XLR Connector
For Forza 60 II/60B II/60C



FL-11
Fresnel Lens



SB-FMM-60
FMM 60 Softbox
FM & Bowens Mount
(EC-FMM60 Eggcrate)



LT-FMM-60
Lantern Softbox 60
FM & Bowens Mount

Forza 300/300B/500/500B II

Match Any Light Source



Rated Power
350W/560W/580W



CCT Range
5600K
2700K-6500K



Built-in 11/12
Practical Effects



CRI: 96+
TLCI: 97+
TM-30 Rf: 94+
TM-30 Rg: 102+



Compatible with
Bowens Mount
Ecosystem Modifiers



AC/DC Supply



-23dB



Lightweight
Compact Design



On-board
NANLINK APP
Remote Control
DMX/RDM



Output Modes
Maximum & Constant
(bi-color only)



±80



Firmware
Upgradable



Quick Release
Device



SMART/FULL SPEED
LOW SPEED/OFF



Integrated Control
Unit & Power Adapter



Forza 300/300B II:
69,400lux/43,480lux@1M
(with reflector at 5600K)



Includes:

Light × 1, Control Unit × 1, Connectiobn Cable 3M × 1, Power Cable 6M × 1, Reflector × 1, COB Protective Cap × 1, Quick Release Clamp × 1, Carrying Bag × 1, User Manual × 1, DMX Reference Guide × 1

Forza 720/720B

Light Redefined, Form Reshaped



Rated Power
800W



CCT Range
5600K
2700K-6500K



Built-in 11/12
Practical Effects



CRI: 95+
TLCI: 98+
TM-30 Rf: 93+
TM-30 Rg: 100+



Lightweight
Compact Design



Compatible with
Bowens Mount
Ecosystem Modifiers



Firmware
Upgradable



On-board
NANLINK APP
Remote Control
DMX/RDM



Output Modes
Maximum & Constant
(bi-color only)



AC/DC Supply



10,200lux/7,919lux@3m
(with reflector at 5600K)



Includes:

Light × 1, Control Unit × 1, Connectiobn Cable 5M × 1, Power Cable 4.5M × 1, Reflector × 1, COB Protective Cap × 1, Quick Release Clamp × 1, Carrying Bag × 1, User Manual × 1, DMX Reference Guide × 1

Bowens Mount Accessories (Optional)



FL-20G Fresnel Lens with barndoor



RC-1 Remote Controller



WS-RC-C2 2.4G Remote Controller



WS-TB-1 NANLINK BOX



BT-V-14.8V160 V-mount Battery 14.8V 160WH

BT-CGV-14.8V-1 Battery Charger for Single 14.8V V-mount Battery



BT-V-26V230/BT-V-26V270 V-mount Battery 26V 230WH/270WH

BT-CGV-26V-1/BT-CGV-26V-2 Battery Charger for Single Dual 26V V-mount Battery



CB-FZ-7.5M Forza 7.5M Connection Cable



CB-FZ-12M Forza 12M Connection Cable



SB-ST-140X30 Strip Softbox
SB-AS-110X45 Asymmetric Softbox
SB-RT-90x60 Rectangle SoftBox
EC-140X30/EC-110X45 Eggcrate



LT-80/LT-120 Lantern Softbox



SB-PR-90/120/150-Q Quick Release Parabolic Softbox
SB-PR-90/120/150 Parabolic Softbox
EC-PR90/120/150 Eggcrate



U-135DS/U-165DT/U-180ST Umbrella

Forza Kit



Forza 60/60B II/60C 3KIT-PT

Light x 3
Power Adapter 15V/6A x 3
RF-FMM-45-S Reflector x 3
FL-11 Fresnel Lens x 1
BH-FZ60 Battery Holder x 3
CC-PT-37 Trolley Case x 1



Forza 150/150B 3Kit-PT

Light x 3, Power Adapter 24V/7.5A x 3
Power Cable 4.5M x 3
RF-FMM-45 Reflector x 3
AS-BA-FMM Bowens Adapter x 3
FL-11 Fresnel Lens x 1
BT-BG-XLR4 Battery Grip x 3
User Manual x 1, DMX Reference Guide x 1
LS-186-5/8 Light Stand x 3
CC-PT-62 Trolley Case x 1



Forza 300/300B/500/500B II 2KIT-ST

Light x 2
Control Unit x 2
COB Protective Cap x 2
Reflector x 2
DC Connection Cable 3M x 2
AC Power Cable 6M x 2
Quick Release Clamp x 2
DMX Reference Guide x 1
Trolley Case x 1



Forza 720/720B KIT-ST

Light x 1
Control Unit x 1
DC Connection Cable 5M x 1
AC Power Cable 6M x 1
Reflector x 1
COB Protective Cap x 1
Quick Release Clamp x 1
CC-ST-FZ720 Trolley Case x 1
DMX Reference Guide x 1





Commercial Shooting



Film Production



Interview Scene/Live Stream

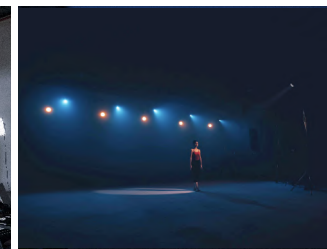

Photography



Projection Attachment (Optional)

FM Mount




PJ-FMM-AI
18 Bladed Adjustable
Iris diaphragm



PJ-FMM-LENS-19
19° Lens for Projection
Attachment with FM mount



PJ-FMM-LENS-36
36° Lens for Projection
Attachment with FM mount

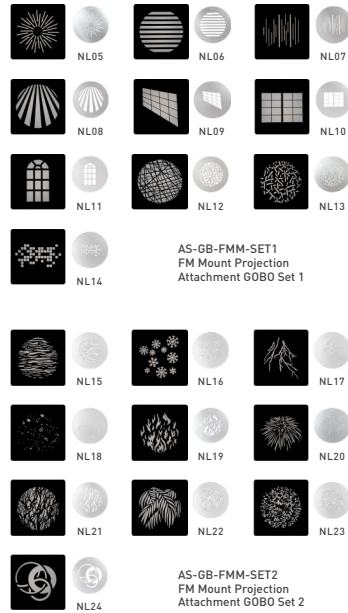

Bowens Mount




PJ-BM-AI
Adjustable Iris Diaphragm
for PJ-BM



PJ-BM-LENS-19
19° Lens for Bowens Mount
Projection Attachment



PJ-BM-LENS-36
36° Lens for Bowens Mount
Projection Attachment

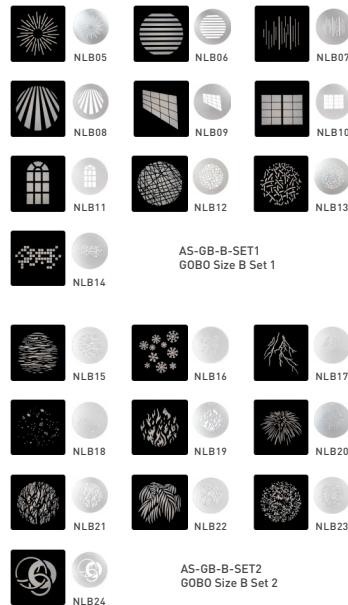

PJ-FMM-19/36
Projection Attachment
with FM Mount

PJ-BM-19/36
Bowens Mount
Projector Attachment

Forza Technical Data

Model	Forza 60 II			Forza 60B II								
Rated Power	72W											
Input Voltage/Current	DC 15V/6A Max, AC 100-240V 50/60Hz											
CRI	95			Average 96								
TLCI	98			Average 98								
CCT	5600K			2700K-6500K								
Dimming	0-100%											
Control	On-board, Remote Control, NANLINK APP, DMX/RDM											
Special Effects	CCT Loop(bi-color only), INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion and Welding											
Product Size	200 x 108 x 84mm/7.87 x 4.25 x 3.31"											
Product Weight	0.84kg / 1.85lb			0.7kg / 1.54lb								
Ilumination(lux / fc)												
Forza 60 II												
Distance	1M		2M		3M							
Light Only	3420 lux 318 fc		854 lux 79 fc		414 lux 38 fc							
With Reflector	17620 lux 1637 fc		3980 lux 370 fc		1651 lux 153 fc							
With FL-10G Spot	41580 lux 3863 fc		9666 lux 898 fc		4039 lux 375 fc							
With FL-10G Flood	9478 lux 881 fc		2150 lux 200 fc		973 lux 90 fc							
With PJ-FMM-19	60000 lux 5574 fc		10770 lux 1001 fc		4469 lux 415 fc							
With PJ-FMM-36	23790 lux 2210 fc		4498 lux 418 fc		1850 lux 172 fc							
Forza 60B II												
Color Temperature	2700K			3200K			5600K			6500K		
Distance	1M	2M	3M	1M	2M	3M	1M	2M	3M	1M	2M	3M
Light Only	2096 lux 195 fc	533 lux 50 fc	254 lux 24 fc	2235 lux 208 fc	569 lux 53 fc	270 lux 25 fc	2577 lux 239 fc	649 lux 60 fc	308 lux 29 fc	2529 lux 235 fc	646 lux 60 fc	307 lux 29 fc
With Reflector	11430 lux 1062 fc	2540 lux 236 fc	1098 lux 102 fc	12170 lux 1131 fc	2731 lux 254 fc	1182 lux 110 fc	14350 lux 1333 fc	3186 lux 296 fc	1381 lux 128 fc	14090 lux 1309 fc	3183 lux 296 fc	1372 lux 127 fc
With FL-10G Spot	28260 lux 2625 fc	6520 lux 606 fc	2823 lux 262 fc	30120 lux 2798 fc	6986 lux 649 fc	3045 lux 283 fc	34700 lux 3224 fc	8202 lux 762 fc	3563 lux 331 fc	34550 lux 3210 fc	8071 lux 750 fc	3540 lux 329 fc
With FL-10G Flood	5472 lux 508 fc	1378 lux 128 fc	623 lux 58 fc	5887 lux 547 fc	1464 lux 136 fc	665 lux 62 fc	6852 lux 637 fc	1725 lux 160 fc	769 lux 71 fc	6810 lux 633 fc	1713 lux 159 fc	759 lux 71 fc
With PJ-FMM-19	42640 lux 3961 fc	7650 lux 711 fc	3086 lux 287 fc	45560 lux 4233 fc	8154 lux 758 fc	3305 lux 307 fc	53070 lux 4930 fc	9377 lux 871 fc	3826 lux 355 fc	52950 lux 4919 fc	9352 lux 869 fc	3822 lux 355 fc
With PJ-FMM-36	18050 lux 1677 fc	3320 lux 308 fc	1390 lux 129 fc	19210 lux 1785 fc	3583 lux 333 fc	1475 lux 137 fc	21980 lux 2042 fc	4113 lux 382 fc	1714 lux 159 fc	21650 lux 2011 fc	4109 lux 382 fc	1695 lux 157 fc

Forza Technical Data

Model	Forza 60C
Rated Rower	88W
Input Voltage/Current	DC 15V/6A Max, AC 100-240V 50/60Hz
CRI	Average 96
TLCI	Average 95
CCT	1800K-20000K (G/M ±100)
Dimming	0-100%
Control	On-board, Remote Control, NANLINK APP, DMX/RDM
Special Effects	HUE Loop, CCT Loop, INT Loop, Flash, Pulse, Storm, Police Car, TV, Paparazzi, Candle/Fire, Disco, Bad Bulb, Firework, Explosion and Welding
Product Size	224 × 110 × 88mm / 8.82 × 4.33 × 3.46"
Product Weight	1.08kg / 2.38lb

Illumination(lux / fc)

Model	Forza 60C						
Light Only							
Distance	2700K	3200K	5600K	7500K	R	G	B
1M	5656 lux / 525 fc	5694 lux / 529 fc	5709 lux / 530 fc	5567 lux / 517 fc	1282 lux / 119 fc	3855 lux / 358 fc	520 lux / 48 fc
2M	1402 lux / 130 fc	1433 lux / 133 fc	1425 lux / 132 fc	1388 lux / 129 fc	317 lux / 29 fc	953 lux / 89 fc	129 lux / 12 fc
3M	631 lux / 59 fc	648 lux / 60 fc	646 lux / 60 fc	630 lux / 59 fc	142 lux / 13 fc	428 lux / 40 fc	59 lux / 5 fc

With Reflector							
Distance	2700K	3200K	5600K	7500K	R	G	B
1M	12470 lux / 1158 fc	12750 lux / 1184 fc	12810 lux / 1190 fc	12460 lux / 1158 fc	2866 lux / 268 fc	8792 lux / 817 fc	1200 lux / 111 fc
2M	2839 lux / 264 fc	2939 lux / 273 fc	2946 lux / 274 fc	2866 lux / 266 fc	656 lux / 61 fc	2016 lux / 187 fc	275 lux / 26 fc
3M	1238 lux / 115 fc	1278 lux / 119 fc	1283 lux / 119 fc	1254 lux / 116 fc	290 lux / 27 fc	876 lux / 81 fc	120 lux / 11 fc

With FL-11 Spot							
Distance	2700K	3200K	5600K	7500K	R	G	B
1M	35260 lux / 3276 fc	36350 lux / 3377 fc	37520 lux / 3486 fc	36560 lux / 3396 fc	9440 lux / 877 fc	24750 lux / 2299 fc	4940 lux / 459 fc
2M	8303 lux / 771 fc	8506 lux / 790 fc	8780 lux / 816 fc	8530 lux / 792 fc	2171 lux / 202 fc	5753 lux / 534 fc	790 lux / 73 fc
3M	3539 lux / 329 fc	3660 lux / 340 fc	3804 lux / 353 fc	3712 lux / 345 fc	935 lux / 87 fc	2503 lux / 233 fc	340 lux / 32 fc

With FL-11 Flood							
Distance	2700K	3200K	5600K	7500K	R	G	B
1M	10800 lux / 1003 fc	11000 lux / 1022 fc	11310 lux / 1051 fc	11040 lux / 1026 fc	2594 lux / 241 fc	7480 lux / 695 fc	1020 lux / 95 fc
2M	2720 lux / 253 fc	2777 lux / 258 fc	2858 lux / 266 fc	2792 lux / 259 fc	656 lux / 61 fc	1879 lux / 175 fc	256 lux / 24 fc
3M	1222 lux / 114 fc	1248 lux / 116 fc	1279 lux / 119 fc	1250 lux / 116 fc	293 lux / 27 fc	838 lux / 78 fc	115 lux / 11 fc

With PJ-FMM-19							
Distance	2700K	3200K	5600K	7500K	R	G	B
1M	40690 lux / 3780 fc	41920 lux / 3894 fc	42700 lux / 3967 fc	41500 lux / 3855 fc	9950 lux / 924 fc	28310 lux / 2630 fc	5330 lux / 495 fc
2M	7673 lux / 713 fc	7899 lux / 734 fc	8045 lux / 747 fc	7825 lux / 727 fc	1870 lux / 174 fc	5272 lux / 490 fc	680 lux / 63 fc
3M	3164 lux / 294 fc	3259 lux / 303 fc	3313 lux / 308 fc	3231 lux / 300 fc	767 lux / 71 fc	2144 lux / 199 fc	280 lux / 26 fc

With PJ-FMM-36							
Distance	2700K	3200K	5600K	7500K	R	G	B
1M	16130 lux / 1498 fc	16610 lux / 1543 fc	17500 lux / 1626 fc	17140 lux / 1592 fc	4160 lux / 386 fc	11800 lux / 1096 fc	1540 lux / 143fc
2M	3135 lux / 291 fc	3269 lux / 304 fc	3468 lux / 322 fc	3379 lux / 314 fc	812 lux / 75 fc	2284 lux / 212 fc	310 lux / 29 fc
3M	1300 lux / 121 fc	1358 lux / 126 fc	1440 lux / 134 fc	1400 lux / 130 fc	338 lux / 31 fc	943 lux / 88 fc	126 lux / 12 fc

Forza Technical Data

Model	Forza 150	Forza 150B
Rated Power	170W	
Input Voltage/Current	DC 24V / 7.5A Max, AC 100-240V 50 / 60Hz	
CRI	96	Average 96
TLCI	98	Average 98
CCT	5600K	2700K-6500K

Dimming	0-100%	
Control	On-board, Remote Control, NANLINK APP, DMX/RDM	
Special Effects	CCT Loop(bi-color only), INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion and Welding	
Product Size	227 × 133 × 115mm / 8.94 × 5.24 × 4.53"	247 × 133 × 115mm / 9.72 × 5.24 × 4.53"
Product Weight	1.36kg / 3.00lb	1.56kg / 3.44lb

Illumination(lux / fc)

Forza 150			
Color Temperature	5600K		
Distance	1M	2M	3M
Light Only	6870 lux 638 fc	1760 lux 164 fc	858 lux 80 fc
With Reflector	27960 lux 2597 fc	6655 lux 618 fc	2824 lux 262 fc
With FL-11 Spot	17050 lux 1584 fc	4260 lux 396 fc	2009 lux 187 fc
With FL-11 Flood	69200 lux 6429 fc	16800 lux 1561 fc	7658 lux 711 fc
With PJ-FMM-19	95750 lux 8895 fc	18870 lux 1753 fc	7465 lux 693 fc
With PJ-FMM-36	33060 lux 3071 fc	6713 lux 624 fc	2816 lux 262 fc

Forza 150B												
Color Temperature	2700K			3200K			5600K			6500K		
Distance	1M	2M	3M	1M	2M	3M	1M	2M	3M	1M	2M	3M
Light Only	3824 lux 355 fc	1019 lux 95 fc	492 lux 46 fc	4170 lux 387 fc	1127 lux 105 fc	520 lux 48 fc	5121 lux 476 fc	1352 lux 126 fc	644 lux 60 fc	5223 lux 485 fc	1381 lux 128 fc	654 lux 61 fc
With Reflector	17500 lux 1626 fc	3874 lux 360 fc	1600 lux 149 fc	18860 lux 1752 fc	4084 lux 379 fc	1753 lux 163 fc	23130 lux 2149 fc	4826 lux 448 fc	2078 lux 193 fc	23660 lux 2198 fc	5026 lux 467 fc	2135 lux 198 fc
With FL-11 Spot	41300 lux 3837 fc	9800 lux 910 fc	4290 lux 399 fc	45370 lux 4215 fc	10800 lux 1003 fc	4732 lux 440 fc	54290 lux 5044 fc	13050 lux 1212 fc	5721 lux 531 fc	55500 lux 5156 fc	13110 lux 1218 fc	5813 lux 540 fc
With FL-11 Flood	9350 lux 869 fc	2390 lux 222 fc	1087 lux 101 fc	10300 lux 957 fc	2630 lux 244 fc	1187 lux 110 fc	12460 lux 1158 fc	3150 lux 293 fc	1444 lux 134 fc	12750 lux 1184 fc	3206 lux 298 fc	1466 lux 136 fc
With PJ-FMM-19	59360 lux 5515 fc	4437 lux 412 fc	4224 lux 392 fc	64480 lux 5990 fc	11680 lux 1085 fc	4605 lux 428 fc	76560 lux 7112 fc	14000 lux 1301 fc	5594 lux 520 fc	77550 lux 7204 fc	14300 lux 1328 fc	5700 lux 530 fc
With PJ-FMM-36	23450 lux 2179 fc	4437 lux 412 fc	1871 lux 174 fc	25600 lux 2378 fc	4982 lux 463 fc	1972 lux 183 fc	30700 lux 2852 fc	5920 lux 550 fc	2467 lux 229 fc	31090 lux 2888 fc	6019 lux 559 fc	2522 lux 234 fc

Forza Technical Data

Model	Forza 300 II	Forza 300B II	Forza 500 II	Forza 500B II
Rated Power	350W		560W	580W
Input Voltage/Current	DC (Battery) 14.4V-14.8V/12A, AC 100-240V 50/60Hz		DC (Battery) 14.4V-26V/12A, AC 100-240V 50/60Hz	
CRI	96	Average 96	96	Average 96
TLCI	97	Average 97	97	Average 97
CCT	5600K (G/M ±80)	2700K-6500K (G/M ±80)	5600K (G/M ±80)	2700K-6500K (G/M ±80)
Dimming	0-100%		0-100%, by 0.1% increment	
Control	On-board, Remote Control, NANLINK APP, DMX/RDM			
Special Effects	CCT Loop(bi-color only), INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion and Welding			
Product Size	330 × 228 × 123mm / 12.99 × 8.98 × 4.84"		352 × 230 × 142mm 13.9 × 9.1 × 5.6"	400 × 230 × 142mm 15.7 × 9.1 × 5.6"
Product Weight	2.88kg / 6.35lb	2.9kg / 6.39lb	3.88kg / 8.55lb	3.88kg / 8.55lb

Illumination(lux / fc)

Forza 300 II

Color Temperature	5600K		
Distance	1M	2M	3M
Light Only	14270 lux 1326 fc	3623 lux 337 fc	1713 lux 159 fc
With Reflector	69400 lux 6447 fc	14920 lux 1386 fc	6321 lux 587 fc
With FL-20G Spot	197000 lux 18301 fc	41120 lux 3820 fc	17430 lux 1619 fc
With FL-20G Flood	39160 lux 3638 fc	10200 lux 948 fc	4576 lux 425 fc
With PJ-BM-19	/	45730 lux 4248 fc	17460 lux 1622 fc
With PJ-BM-36	81570 lux 7578 fc	15030 lux 1396 fc	6063 lux 563 fc

Forza 300B II

Color Temperature	2700K			3200K			5600K			6500K		
Distance	1M	2M	3M	1M	2M	3M	1M	2M	3M	1M	2M	3M
Light Only	9790 lux 909 fc	2496 lux 232 fc	1208 lux 112 fc	10780 lux 1001 fc	2753 lux 256 fc	1336 lux 124 fc	13790 lux 1281 fc	3440 lux 320 fc	1682 lux 156 fc	13720 lux 1275 fc	3431 lux 319 fc	1656 lux 154 fc
With Reflector	31870 lux 2961 fc	6635 lux 616 fc	2871 lux 267 fc	34260 lux 3183 fc	7304 lux 679 fc	3167 lux 294 fc	43480 lux 4039 fc	9275 lux 862 fc	4016 lux 373 fc	43290 lux 4022 fc	9256 lux 860 fc	3997 lux 371 fc
With FL-20G Spot	109000 lux 10126 fc	23340 lux 2168 fc	9970 lux 926 fc	120000 lux 11148 fc	25820 lux 2399 fc	10980 lux 1020 fc	151000 lux 14028 fc	32330 lux 3003 fc	13720 lux 1275 fc	150000 lux 13935 fc	31950 lux 2968 fc	13610 lux 1264 fc
With FL-20G Flood	29220 lux 2715 fc	7798 lux 724 fc	3569 lux 332 fc	32260 lux 2997 fc	8602 lux 799 fc	3963 lux 368 fc	40420 lux 3755 fc	10800 lux 1003 fc	4955 lux 460 fc	40190 lux 3734 fc	10690 lux 993 fc	4919 lux 457 fc
With PJ-BM-19	/	25490 lux 2368 fc	9570 lux 889 fc	/	28310 lux 2630 fc	10580 lux 983 fc	/	35180 lux 3268 fc	13390 lux 1244 fc	/	34750 lux 3228 fc	13170 lux 1223 fc
With PJ-BM-36	46170 lux 4289 fc	8282 lux 769 fc	3356 lux 312 fc	50800 lux 4719 fc	9111 lux 846 fc	3694 lux 343 fc	63070 lux 5859 fc	11370 lux 1056 fc	4576 lux 425 fc	62250 lux 5783 fc	11180 lux 1039 fc	4511 lux 419 fc

Forza Technical Data

Model	Forza 720	Forza 720B
Rated Power	800W	
Input Voltage/Current	DC 48V/16.67A Max, AC 100-240V 50/60Hz	
CRI	95	Average 96
TLCI	96	Average 97
CCT	5600K	2700K-6500K
Dimming	0-100% by 0.1% increment	
Control	On-board, Remote Control, NANLINK APP, DMX/RDM	
Scene Mode	CCT Loop, INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion and Welding.	
Product Size	475 × 231 × 142mm / 18.7 × 9.09 × 5.59"	518×228×142mm / 20.39×8.98×5.59"
Product Weight	4.8kg / 10.58lb	5.3kg / 11.7lb

Illumination(lux / fc)

Forza 720

Color Temperature	5600K		
Distance	3M	5M	7M
Light Only	3777 lux 351 fc	1629 lux 151 fc	903 lux 84 fc
With Reflector	10200 lux 948 fc	3945 lux 366 fc	2211 lux 205 fc
With FL-20G Spot	24980 lux 2321 fc	8618 lux 801 fc	4340 lux 403 fc
With FL-20G Flood	7832 lux 728 fc	3128 lux 291 fc	1787 lux 166 fc
With PJ-FMM-19	22930 lux 2130 fc	7970 lux 740 fc	3464 lux 322 fc
With PJ-FMM-36	8322 lux 773 fc	2773 lux 258 fc	1297 lux 120 fc

Forza 720B

Color Temperature	2700K			3200K			5600K			6500K		
Distance	3M	5M	7M	3M	5M	7M	3M	5M	7M	3M	5M	7M
Light Only	2385 lux 222 fc	1064 lux 99 fc	528 lux 49 fc	2644 lux 246 fc	1192 lux 111 fc	595 lux 55 fc	3116 lux 289 fc	1407 lux 131 fc	716 lux 67 fc	3074 lux 286 fc	1386 lux 129 fc	705 lux 65 fc
With Reflector	5854 lux 544 fc	2319 lux 215 fc	1248 lux 116 fc	6604 lux 614 fc	2618 lux 243 fc	1423 lux 132 fc	7919 lux 736 fc	3152 lux 293 fc	1714 lux 159 fc	7886 lux 733 fc	3121 lux 290 fc	1710 lux 159 fc
With FL-20G Spot	13640 lux 1267 fc	4657 lux 433 fc	2417 lux 225 fc	15290 lux 1420 fc	5292 lux 492 fc	2711 lux 252 fc	17650 lux 1640 fc	6344 lux 589 fc	3234 lux 300 fc	17410 lux 1617 fc	6271 lux 583 fc	3204 lux 298 fc
With FL-20G Flood	5457 lux 507 fc	2139 lux 199 fc	1177 lux 109 fc	6173 lux 573 fc	2426 lux 225 fc	1340 lux 124 fc	7363 lux 684 fc	2884 lux 268 fc	1607 lux 149 fc	7296 lux 678 fc	2866 lux 266 fc	1594 lux 148 fc
With PJ-FMM-19	12970 lux 1205 fc	4163 lux 387 fc	2064 lux 192 fc	14590 lux 1355 fc	4713 lux 438 fc	2321 lux 216 fc	17440 lux 1620 fc	5631 lux 523 fc	2761 lux 256 fc	14360 lux 1334 fc	5524 lux 513 fc	2746 lux 255 fc
With PJ-FMM-36	4476 lux 416 fc	1583 lux 147 fc	840 lux 78 fc	5101 lux 474 fc	1788 lux 166 fc	933 lux 87 fc	6098 lux 567 fc	2123 lux 197 fc	1105 lux 103 fc	6034 lux 561 fc	2090 lux 194 fc	1094 lux 102 fc