NANLITE

D672II / D672BII

LED Soft Panel Light/LED Bi-color Soft Panel Light

1.Large soft LED panel with single color and bi-color options, design to meet your different requirements;

2.High CRI of 95, standard CCT, high color rendition;

3.Multiple Control Options: On-board control, DMX control, 2.4G;

4.Heat-dissipation design on the back ensures high efficiency and long durability;

5.No built-in fan design minimizes noise;

6.Extensive application scenarios: TV production, studio shooting, interview and other production projects, etc.

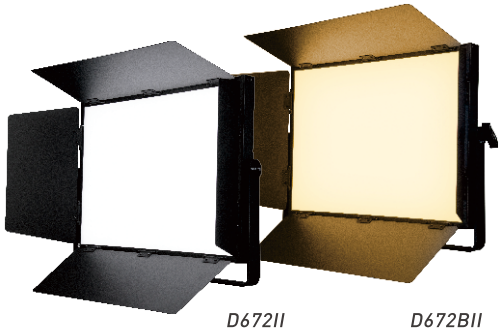

D672II D672BII

On-board DMX 2.4G NANLINK Box

D672II D672BII Technical Data

Model	D672II	D672BII	Model	D672II	D672BII
Rated Power	148W	148W x 2	Dimming	0 to 100 % continuous	0 to 100 % continuous
Input Voltage/Current	110-220V AC	110-220V AC	Control	On-board, 2.4G, DMX	On-board, 2.4G, DMX
CRI	95	95	Product Size	581 x 442 x 93mm / 22.9 x 17.4 x 3.7"	581 x 442 x 93mm / 22.9 x 17.4 x 3.7"
TLCI	93	93			
CCT	5600K	3200K - 5600K	Product Weight	8kg / 17.6lb	8kg / 17.6lb

Illumination(lux/fc)

Model	D672II			Model	D672BII		
Distance	1M	2M	3M	Distance	1M	2M	3M
5600k	2717lux / 253fc	777lux / 72fc	380lux / 35fc	3200k	2381lux / 221fc	692lux / 64fc	337lux / 31fc
				5600k	2671lux / 248fc	747lux / 69fc	363lux / 34fc