

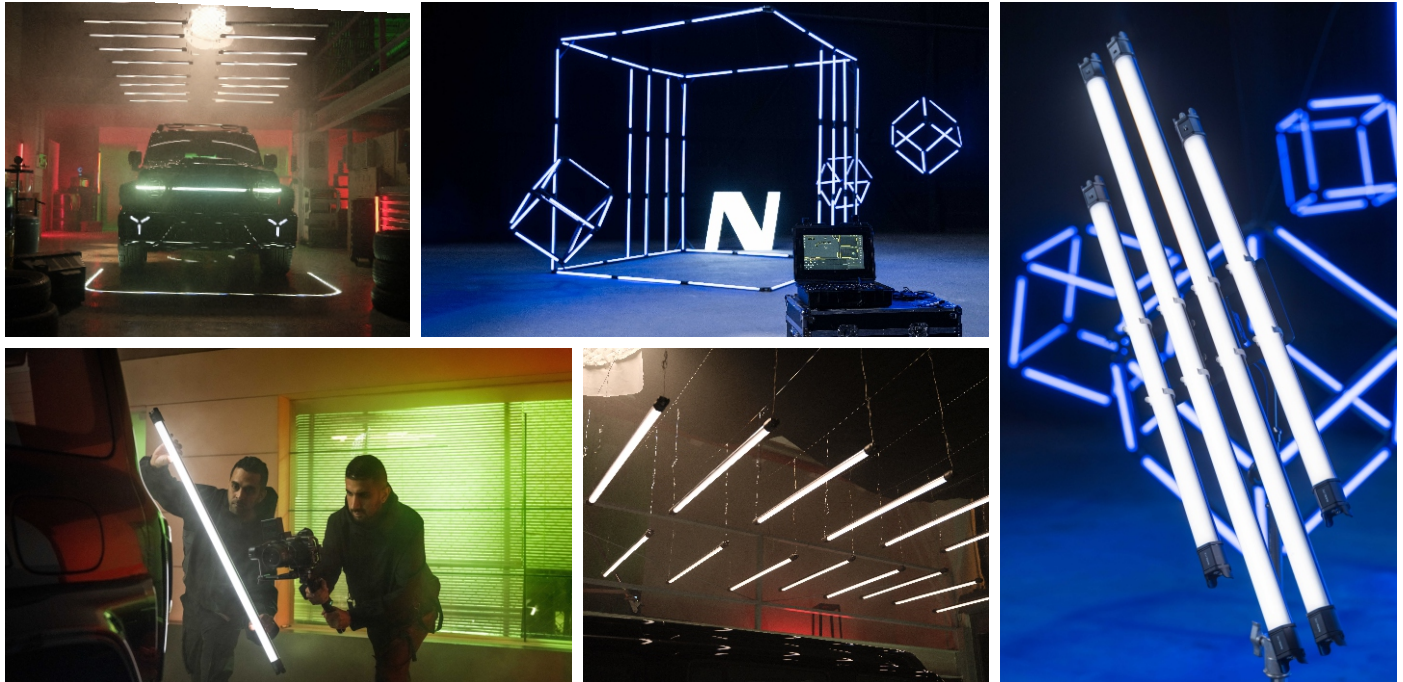


# PavoTube II 15C/30C

RGBWW LED Tube Light

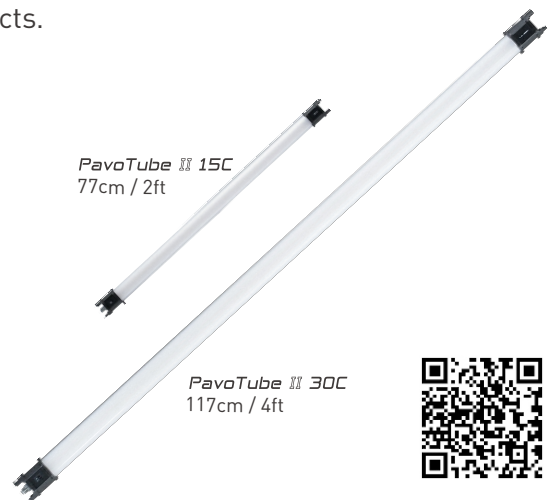

- 1. Excellent Color Rendition** CRI average 97, TLCI average 98, CCT range 2700-7500K with G/M adjustment.
- 2. Intuitive Operation** Two knobs, two buttons and one slide switch for straightforward on-board control.
- 3. Multiple Power Supply Availability** Powered by built-in battery, or by the included 15V/2A (PavoTube II 15C) or 15V/4A (PavoTube II 30C) power adapter, or by PD3.0 power supplying devices.
- 4. More Control Choices** Built-in Bluetooth and 2.4G modules enable NANLINK APP controllability, also support DMX/RDM control.
- 5. Optimized Structure** Innovated diffusion materials ensure LED chips obscured, provide better performance as in-frame practical light and for shooting highly-reflective objects.

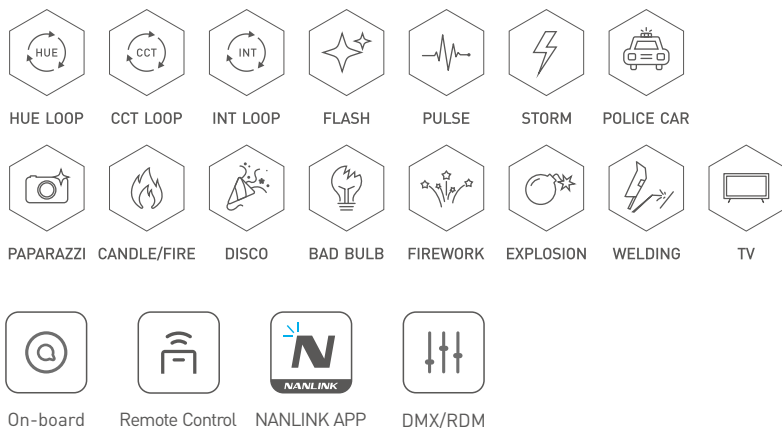

NANLITE Global

## Accessories for T12 Tube Holder (optional)



## Other Accessories (optional)



## Includes

Items	PavoTube II 15C KIT			PavoTube II 30C KIT		
	1 KIT	2 KIT	4 KIT	1 KIT	2 KIT	4 KIT
Light	× 1	× 2	× 4	× 1	× 2	× 4
Power Adapter	× 1	× 2	× 4	× 1	× 2	× 4
Power Cable 3M	× 1	× 2	× 4	× 1	× 2	× 4
HD-T12-1-C Clip	× 1	× 2	× 4	× 1	× 2	× 4
Steel Wire Rope	× 2	× 4	× 8	× 2	× 4	× 8
User Manual	× 1	× 1	× 1	× 1	× 1	× 1
Carrying Bag	× 1	× 1	× 1	× 1	× 1	× 1

## PavoTube II C Technical Data

Model	PavoTube II 15C	PavoTube II 30C
Rated Power	30W	60W
Input Voltage/Current	DC 15V/2A Max AC 100-240V 50/60Hz PD3.0 [9-20V] 20W Min	DC 15V/4A Max AC 100-240V 50/60Hz PD3.0 [12-20V] 30W Min
CRI	Average 97	
TLCI	Average 98	
CCT	2700K-7500K (G/M±150)	
TM-30	Rf:Average 94/Rg:Average 101	
Dimming	0-100%	
Control	On-board, Remote Control, NANLINK APP, DMX/RDM	
Product Size	φ 48 × 770mm/ φ1.89 × 30.31"	φ 48 × 1170mm/ φ1.89 × 46.06"
Product Weight	0.85kg/1.87lb	1.4kg/3.09lb

## Illumination (lux / fc)

Model	PavoTube II 15C		PavoTube II 30C	
	1M	2M	1M	2M
2700K	374 lux/35 fc	103 lux/10 fc	581 lux/54 fc	174 lux/16 fc
3200K	391 lux/36 fc	107 lux/10 fc	599 lux/56 fc	179 lux/17 fc
5600K	423 lux/39 fc	113 lux/10 fc	647 lux/60 fc	193 lux/18 fc
6500K	428 lux/40 fc	117 lux/11 fc	660 lux/61 fc	196 lux/18 fc
R	181 lux/17 fc	50 lux/5 fc	303 lux/28 fc	88 lux/8 fc
G	395 lux/37 fc	108 lux/10 fc	642 lux/60 fc	181 lux/17 fc
B	69 lux/6 fc	19 lux/2 fc	106 lux/10 fc	30 lux/3 fc