


















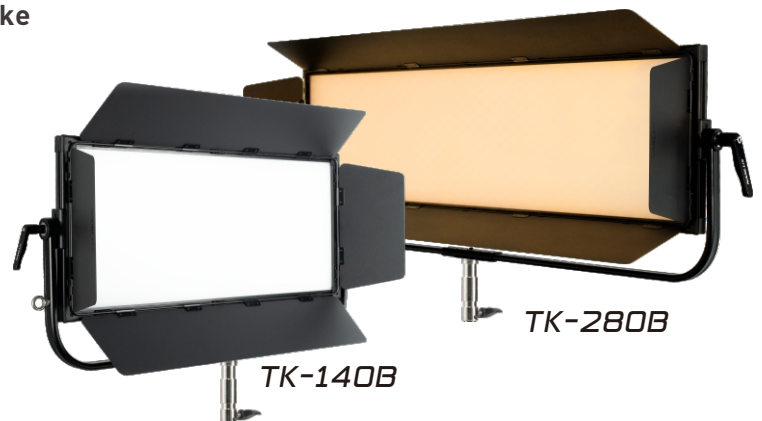
# TK-140B/280B

LED Bi-color Soft Panel Light



1. Allow precision color temperature adjustment between 2700K and 7500K
2. Flicker free, fully dimmable between 0 and 100%
3. Built-in 12 customisable practical effects
4. Support both wired and wireless control via NANLINK APP, DMX/RDM, Remote Control and Lumenradio CRMX
5. Can be powered either by AC adapter provided or an optional 14.8V/26V battery
6. Universal installation, available with a choice of yoke or central mount

					
CCT LOOP	INT LOOP	FLASH	PULSE	STORM	TV
					
PAPARAZZI	CANDLE/FIRE	BAD BULB	FIREWORK	EXPLOSION	WELDING
					
On-board	DMX/RDM	Remote Control	NANLINK APP	Lumenradio	



**Includes:**

TK-140B/280B x 1, Barndoor x 1, Power Supply x 1, Power Cable x 1, Yoke x 1, User Manual x 1, DMX Reference Guide x 1


## Multiple Accessories, More Applications



EC-TK140B/280B  
Eggcrate

HC-TK140B/280B  
Honeycomb Grid

YK-CM-BHG  
Central Mount

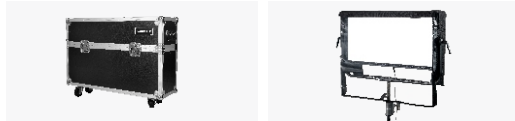

CC-TK140B/280B-2-FT  
Flight case for Dual TK-140B/280B

AS-FC-TK140B/280B  
Fixture Cover

## Take TK-140B/280B Anywhere

Lightweight, portable and with a choice of power options, using either the AC adapter provided, or with an optional 14.8V/26V battery



AC Adapter  
(Included)



14.8V V-mount Battery  
(Optional)



26V V-mount Battery  
(Optional)

## TK Technical Data

Model	TK-140B	TK-280B
Rated Power	160W	280W
Input Voltage/Current	DC 24V/6.67A Max, AC 100-240V 50/60Hz	DC 48V/5.84A Max, AC 100-240V 50/60Hz
Beam Angle	120°	
CRI	Average 95	
TLCI	Average 98	
CCT	2700K-7500K	
Dimming	0-100%	
Control	On-board, Remote Control, NANLINK APP, DMX/RDM, Lumenradio CRMX	
Effects	CCT Loop, INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion and Welding	
Housing	Aluminium	
Mounting	Yoke, Central Mount	
Cooling	Passive air cooling	
Product Size	Light fixture (with yoke): 890×85×540mm/35.04×3.35×21.26"	Light fixture (with yoke): 1340×85×540mm/52.76×3.35×21.26"
Product Weight	Light fixture+Yoke+Barndoor: 8.52kg/18.78lb	Light fixture+Yoke+Barndoor: 13.76kg/30.33lb

## Illumination (lux / fc)

Model	TK-140B		TK-280B	
	3200K	5600K	3200K	5600K
Distance				
1M	3506 lux / 326 fc	3757 lux / 349 fc	5572 lux / 518 fc	5900 lux / 548 fc
3M	407 lux / 38 fc	428 lux / 40 fc	809 lux / 75 fc	860 lux / 80 fc
5M	168 lux / 16 fc	175 lux / 16 fc	333 lux / 31 fc	353 lux / 33 fc
7M	93 lux / 9 fc	97 lux / 9 fc	185 lux / 17 fc	195 lux / 18 fc