



Dyno 650C/1200C

RGBWW LED Soft Panel Light

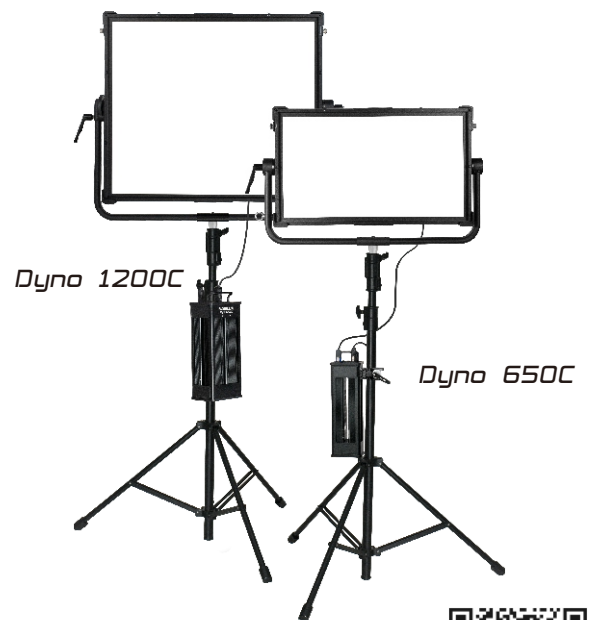

1. High power LED soft panel lights with ultra wide illumination, fully tunable between 2700K-20000K
2. Fully dimmable from 0-100% in ultra-precise intervals of just 0.1%
3. Support both wired and wireless control via NANLINK APP, DMX/RDM, Remote Control and Lumenradio CRMX
4. Built-in 15 customisable practical effects
5. Choice of color modes HSI, RGBW, Gel and XY
6. Intuitive user interface providing effortless control
7. Multiple optional modifiers and compatible with DoPchoice

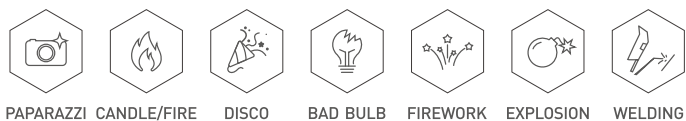

Includes:

Dyno650C/Dyno 1200C × 1, Power Supply × 1, Connection Cable 5M × 1, Power Cable 3M × 1, Standard Diffuser × 1, AS-SCH-DN Dyno Super Clamp × 1, USB Flash Drive × 1, User Manual × 1, DMX Reference Guide × 1

Multiple Accessories, More Applications



Dyno Technical Data		
Model	Dyno 650C	Dyno 1200C
Rated Power	650W	1200W
AC Amp Requirements	110V 6.36A, 220V 3.18A, 240V 2.91A	110V 12.72A, 220V 6.36A, 240V 5.83A
Input Voltage/Current	DC48V/14.6A Max, AC100-240V 50/60Hz	DC48V/29.2A Max, AC100-240V 50/60Hz
OPTICAL	Beam Angle: 160° LED Type: RGBWW	
CRI	Average 95	
TLCI	Average 95	
CCT	2700K-20000K (G/M±100)	
Dimming	0-100%, stepless 0.1% from 1%-100%	
Control	On-board, Remote Control, NANLINK APP, DMX/RDM, Lumenradio CRMX	
On Board Effects	Hue Loop, CCT Loop, INT Loop, Flash, Pulse, Storm, Police Car, TV, Paparazzi, Candle/Fire, Disco, Bad Bulb, Firework, Explosion, Welding	
Housing	Aluminium	
Mounting	Fully adjustable yoke 5/8" (28mm) Junior pin	
Cooling	Fan, Max ambient temp:45°C	
Product Size	Light fixture: 857×173×630mm/33.74×6.81×24.80" Power supply: 134×104×460mm/5.31×4.09×18.11"	Light fixture: 1023×173×918mm/40.28×6.81×36.14" Power supply: 191×134×460mm/7.52×5.28×18.11"
Product Weight	Light fixture: 15.8kg/34.8lb Power supply: 4.2kg/9.3lb	Light fixture: 26.2kg/57.8lb Power supply: 7.5kg/16.5lb

Illumination(lux/fc)									
Model		Dyno 650C				Dyno 1200C			
Distance		3M	5M	7M	9M	3M	5M	7M	9M
CCT Boost Mode	3200K	2403 lux 223 fc	979 lux 91 fc	546 lux 51 fc	339 lux 31 fc	5083 lux 472 fc	2077 lux 193 fc	1145 lux 106 fc	720 lux 67 fc
	5600K	2649 lux 246 fc	1082 lux 101 fc	601 lux 56 fc	373 lux 35 fc	5596 lux 520 fc	2282 lux 212 fc	1247 lux 116 fc	779 lux 72 fc
CCT Standard Mode	3200K	2080 lux 193 fc	850 lux 79 fc	474 lux 44 fc	293 lux 27 fc	4403 lux 409 fc	1804 lux 168 fc	975 lux 91 fc	613 lux 57 fc
	5600K	2237 lux 208 fc	919 lux 85 fc	512 lux 48 fc	318 lux 30 fc	4718 lux 438 fc	1934 lux 180 fc	1048 lux 97 fc	658 lux 61 fc